

Project _____

Item # _____

Quantity _____



GLOBE FOOD EQUIPMENT COMPANY

10 Quart Mixer, Québec

SPC10



SPC10 10 Quart Mixer

Model with Québec Specifications

SPC10 - 10 Quart Mixer

Complies to the following
Canadian requirements:



- NF 454-00
- CSA Z432-04
- CSA, C22.2



Standard Features

- Powerful 1/3 HP custom built motor
- Three fixed speeds
- Gear driven, high torque transmission
- Heat-treated hardened steel alloy gears and shafts
- Permanently lubricated transmission
- Thermal overload protection
- Rigid cast iron body
- Stainless steel bowl guard with built in ingredient chute
- NSF approved enamel gray paint
- Front mounted controls
- 15 minute timer
- Industry standard #12 attachment hub
- Safety interlocked bowl guard and bowl lift
- Non-slip rubber feet
- 6 foot cord and ground plug

Standard Accessories

- 10 quart stainless steel bowl
- Flat beater (aluminum)
- Stainless steel wire whip
- Spiral dough hook (aluminum)

Optional Attachments/Accessories

- Slicer/shredder/grater for #12 hub
- Meat grinder for #12 hub
- Flat beater (stainless steel)
- Spiral dough hook (stainless steel)
- Mixer table with undershelf

Standard Warranty

- Two-years parts and one year labor

Approved By: _____

Date: _____

Built into each mixer is the quality of workmanship and design synonymous with Globe.



GLOBE FOOD EQUIPMENT COMPANY

www.globeslicers.com

2153 Dryden Rd.
Dayton, OH 45439
Phone: 937-299-5493
Phone: 800-347-5423
Fax: 937-299-4147



10 Quart Mixer, Québec

SPC10

Specifications

Motor: 1/3 HP, grease packed ball bearing, air cooled, 115/60/1, 8 amps. Thermal overload protection (automatic reset).

Finish: NSF approved enamel gray paint.

Capacity: 10 quart (9 liter) bowl.

Transmission: Fixed speed transmission is made of heat treated, hardened alloy, precision milled gears that operate the planetary action and provide high torque mixing power. The gears are packed in a long lasting grease, and all shafts are mounted in ball bearings.

Safety Interlocks: The bowl guard and bowl lift lever are interlocked. The mixer will automatically shut down when the guard is opened or the bowl is lowered.

Agitator Speeds (RPMs):

Low	104
Intermediate	194
High	353

Attachment Speeds (RPMs):

Low	59
Intermediate	110
High	201

Standard Equipment: Standard equipment includes a 10 quart #304 series stainless steel bowl, aluminum spiral dough hook, stainless steel wire whip, aluminum flat beater, stainless steel bowl guard with built in ingredient chute, 15 minute timer, and #12 attachment hub. A sturdy hand lever on the body column raises and lowers the bowl as well as locking in place at the top and bottom positions.

Cord: 6 ft. flexible three wire cord and ground plug.

Dimensions:

Foot Print = 15" x 16"
(37.1 cm x 40.6 cm)
Overall Length = 21.25" (53.8 cm)
Overall Width = 16.3" (41 cm)
Overall Height = 30.5 (77.47 cm)

Shipping Information:

Freight Class: 85
Net Weight: 132 lbs. (60 kg)
Shipping Weight: 245 lbs.(111.1 kg)
Shipping Dimensions:
32"W x 40"D x 42"H
(81.3 cm x 101.6 cm x 106.7cm)
Cartons are affixed to a skid (pallet). The weight and dimensions of this skid are included above and may vary from shipment to shipment.

Optional Accessories:

- XXBEAT-10SS** Stainless Steel Flat Beater
- XXHOOK-10SS** Stainless Steel Spiral Dough Hook

XTABLE Mixer Table with Undershef (stainless steel top with galvanized steel undershef and legs)
30"W x 24"D x 24"H
(76.2cm x 61cm x 61cm)

Optional Attachments:

XMCA-SS Meat Grinder Assembly (Polished stainless steel cylinder, worm, ring, and pan. Includes knife, 3/16" plate, stainless steel pan, and pusher.)

Chopper Plate Sizes Available:

- CP02-12** 1/16" (2mm)
- CP04-12** 5/32" (4mm)
- CP05-12** 3/16" (5mm)
- CP06-12** 1/4" (6mm)
- CP08-12** 5/16" (8mm)
- CP10-12** 3/8" (10mm)
- CP12-12** 1/2" (12mm)
- CP14-12** 9/16" (14mm)
- CP16-12** 5/8" (16mm)
- CP18-12** 11/16" (18mm)
- CP00-12** Stuffing Plate
- XST12** 1/2" stuffing tube (sheep)
- XST34** 3/4" stuffing tube (hog)

XVSGH 9" Slicer/Shredder/Grater Housing Only (*no plates included- must select from plates below*)

XASP Adjustable slicing plate


XPH Plate holder - *only 1 required

Shredding/Grating Plates:

- XSP332*** 3/32" (2.3mm)
- XSP316*** 3/16" (4.7mm)
- XSP14*** 1/4" (6.3mm)
- XSP516*** 5/16" (7.9mm)
- XSP12*** 1/2" (12.7mm)
- XGP*** Grating plate

Complies with the following Canadian (Québec) requirements

• NF 454-00 • CSA Z432-04 • CSA, C22.2

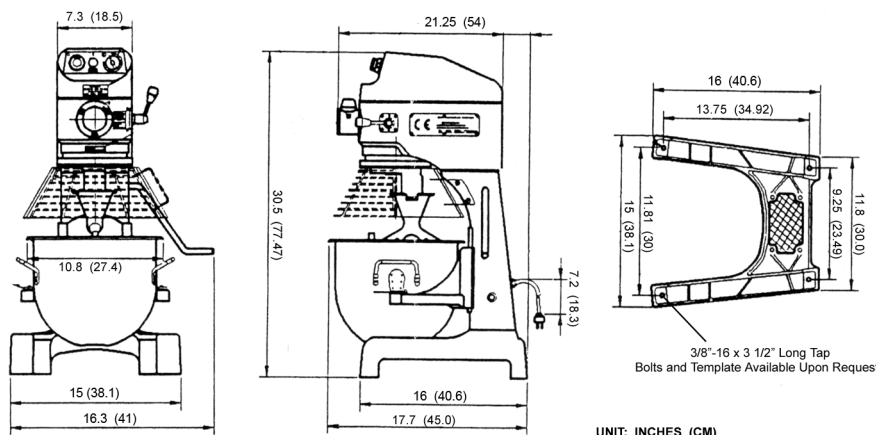

GLOBE FOOD EQUIPMENT COMPANY

www.globeslicers.com

2153 Dryden Rd.
Dayton, OH 45439
Phone: 937-299-5493
Phone: 800-347-5423
Fax: 937-299-4147

Specifications are subject to change without notice.

Printed in U.S.A. 7-2009 • Rev. 1 3-2012