

DELTA NG 120 R290 115 V / 60 Hz

SELF-CONTAINED ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES
- ▶ A3S: ANTI-SCALE SPRAY SYSTEM. ITV PATENTED SPRAY SYSTEM WITH FLEXIBLE NOZZLES THAT AVOID LIMESCALE DEPOSITS WITH SMALL VIBRATIONS
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKLIN OR SIMILAR) WITHOUT COOLING
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 105MM TO 155MM



	24 H	70°F/20°C	50°F/10°C	90°F/32°C	70°F/21°C	lbs (Kg)	in (mm)	in (mm)	
DELTA NG 120 A		108 (49)		95 (43)		44 (20)	Width 18.31" (465) Depth 23.43" (595) Height* 31.06" (789)	Width 21.26" (540) Depth 25.98" (660) Height 36.22" (920)	DELTA 40gr 1.57" (Ø) x 1.73" (H) 40 (Ø) x 44 mm (H) Average dimensions
DELTA NG 120 W		- (-)		- (-)					

* WITH LEGS 35.20"/37.17"(894/944)

ACCESSORIES

INCLUDED



WATER OUTLET HOSE



6" HEIGHT ADJUSTABLE LEG KIT



SCOOP

NOT INCLUDED (OPTIONAL)



ANTI-LIMESCALE FILTER



10" FILTER ANTI-LIMESCALE + ANTI-CHLORINE CS-101 K



PARTICLE FILTER




C4 WATER SOFTENER



SCALE KLEEN

TECHNICAL SCHEME

DELTA NG 120

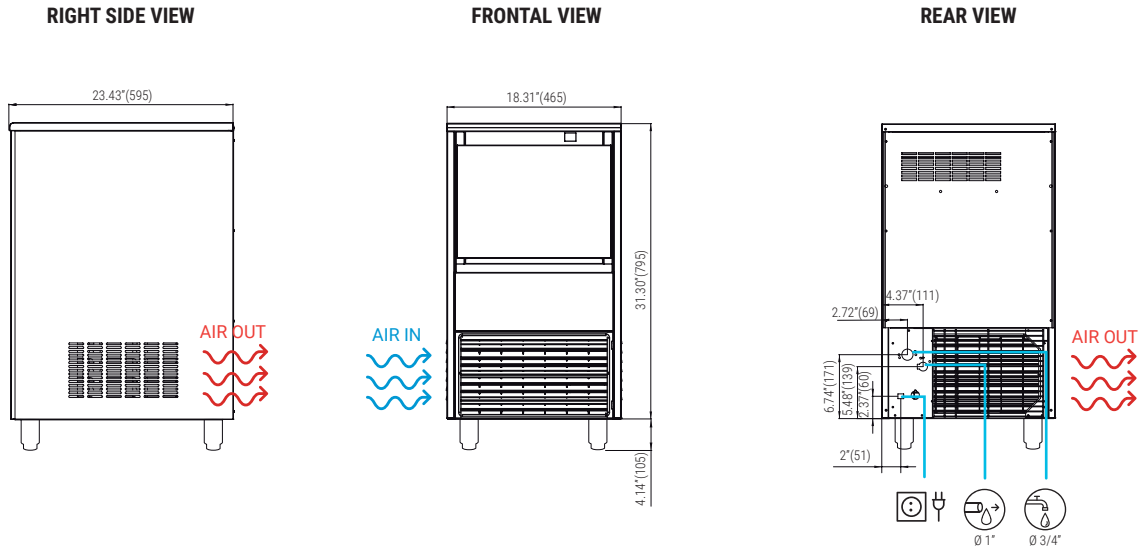

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V
41°F/109°F
41°F/95°F
14.5 psi (1 bar) / 87 psi (6 bar)
24 Ice cubes/cycle

R290
V | Hz | pH
115 | 60 | 1N

DELTA NG 120 AIR COOLED						DELTA NG 120 WATER COOLED					
°F	50°	60°	70°	86°		°F	50°	60°	70°	86°	
10°	10°	15°	21°	30°		10°	10°	15°	21°	30°	
50°	108	106	101	95		50°	-	-	-	-	
68°	108	104	99	93		68°	-	-	-	-	
90°	101	97	95	90		90°	-	-	-	-	
109°	93	86	82	75		109°	-	-	-	-	
43°						43°					

MODELS	ASHRAE CONDITIONS (BTU/h)	(W)	(W) 109°F	(AWG/mm²) (n.)	FUSE	100lbs (Kwh/100 lbs) 90°F / 70°F	gal 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)
DELTA NG 120 A	4,163	1,220	382	16/1.5	3	10	8.6	44.3 6.6	3,333 889	99 123
DELTA NG 120 W	-	-	-	-	-	-	-	-	-	-



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS ON COMPRESSOR & EVAPORATOR
Read our warranty policy to know more about limitations and exclusions

